#### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:
H04N 7/16, 7/167

(11) International Publication Number: WO 97/38530

(43) International Publication Date: 16 October 1997 (16.10.97)

(21) International Application Number:

PCT/EP97/01557

(22) International Filing Date:

21 March 1997 (21.03.97)

(30) Priority Data:

96200907.2

3 April 1996 (03.04.96)

EP

(34) Countries for which the regional or international application was filed:

AT et al.

(71) Applicant (for all designated States except US): DIGCO B.V. [NL/NL]; Jupiterstraat 42, NL-2132 HD Hoofddorp (NL).

(72) Inventors; and


- (75) Inventors/Applicants (for US only): RIX, Simon, Paul, Ashley [ZA/ZA]; 51 Ixia Road, Primrose Hill, Germiston, Transvaal (ZA). GLASSPOOL, Andrew [GB/GB]; Telford Point, Telford Road, Basingstoke RG21 2XZ (GB). DAVIES, Donald, Watts [GB/GB]; 15 Hawkewood Road, Sunburyon-Thames, Middlesex TW16 6HL (GB).
- (74) Agents: DE VRIES, Johannes, Hendrik, Fokke et al.; De Vries & Metman B.V., Overschiestraat 184 N, NL-1062 XK Amsterdam (NL).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD,

Published

With international search report.

(54) Title: METHOD FOR PROVIDING A SECURE COMMUNICATION BETWEEN TWO DEVICES AND APPLICATION OF THIS METHOD

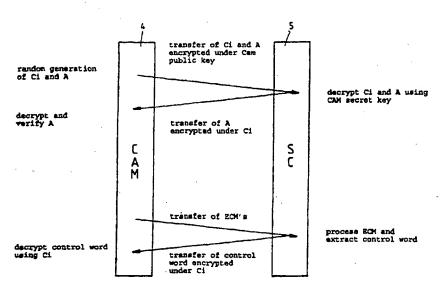

#### (57) Abstract

In a method for providing a secure communication between two devices, a first device generates a random key (Ci) and transfers this key to a second device in a first message encrypted using a plublic key. The second device decrypts the first encrypted message by means of a corresponding secret key to obtain the random key (Ci) and this random key is used to encrypt and decrypt all transmissions between these devices. In a decoder for a pay TV system, comprising a conditional access module and a smart card, this method is applied to provide a secure communication between the control access module and the smart card and/or between the decoder and the conditional access module.

#### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT ·	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco .	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan .
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	, IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP .	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	. NL	Netherlands	ΥU	Yugoslavia
СН	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		,
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

WO 97/38530 PCT/EP97/01557

Method for providing a secure communication between two devices and application of this method

The present invention relates to a method for providing a secure communication between two devices, in particular between devices used in a pay TV system.

In a pay TV system each subscriber generally has a decoder for descrambling the source component signal, wherein said decoder comprises a conditional access module and a smart card for decrypting entitlement control messages and entitlement management messages. In order to prevent unauthorized operation of the decoder for descrambling a source component signal it is important to prevent switching between an authorized and an unauthorized smart card for example.

The invention aims to provide a method of the abovementioned type wherein the communication between two devices, such as the control access module and the smart card or
the decoder and the conditional access module, is arranged
in such a manner that switching between authorized and
unauthorized devices is not possible.

According to the invention a method is provided,

wherein a first device generates a random key (Ci) and
transfers said key to a second device in a first message
encrypted using a public key, wherein said second device
decrypts the first encrypted message by means of a corresponding secret key to obtain said random key (Ci), wherein

said random key is used to encrypt and decrypt further
transmissions between said devices.

According to the invention this method can be applied in a decoder for a pay TV system, wherein said decoder comprises a conditional access module and a smart card,

wherein said method is applied to provide a secure communication between the control access module and the smart

15

25

card or between the decoder and the conditional access module. The invention further provides a decoder for a pay TV system, comprising a conditional access module and a smart card, said conditional access module comprising means for 5 generating a random key (Ci), means for encrypting said key in a first encrypted message using a public key encryption method, means for transfering said first encrypted message to the smart card, said smart card comprising means for receiving and decrypting said first encrypted message to obtain said random key, means for encrypting transmissions to the conditional access module under said random key, said conditional access module having means to decrypt said transmissions received from the smart card.

In a further embodiment of the invention, said decoder comprises a conditional access module and a smart card, wherein said decoder comprises means for generating a random key (Ci), means for encrypting said key in a first encrypted message using a public key encryption method, means for transfering said first encrypted message to the 20 conditional access module, said conditional access module comprising means for receiving and decrypting said first encrypted message to obtain said random key, means for encrypting transmissions to the decoder under said random key, said decoder having means to decrypt said transmissions received from the conditional access module.

The invention will be further explained by reference to the drawings in which an embodiment of the method of the invention is explained as applied in a decoder for a pay TV system.

30 Fig. 1 shows a block diagram of an embodiment of the decoder according to the present invention.

Fig. 2 shows a sequence of steps of an embodiment of the method of the invention.

Referring to fig. 1 there is shown in a very schematical manner a block diagram of a decoder for a pay TV system, wherein digital information signals are scrambled using a control word in accordance with the Eurocrypt

standard for example. In this embodiment the decoder comprises a demodulator 1, a demultiplexer 2 and a decompression unit 3. The decoder further comprises a conditional access module or CAM 4 and a smart card 5 which can be inserted into a connection slot of the conditional access module 4. Further the decoder is provided with a microprocessor 6 for configuration and control purposes.

The conditional access module 4 is provided with a descrambler unit 7 and a microprocessor 8 having a memory 9. The smart card 5 comprises a microprocessor 10 having a memory 11.

As the operation of the above-mentioned parts of the decoder is not a part of the present invention, this operation will not be described in detail. Typically, the signal received by the demodulator 1 is a modulated data stream between 950 MHz and 2050 MHz. The output of the demodulator 1 is a scrambled digital data stream which is provided to the CAM 4 and the descrambler 7 will be allowed to descramble this scrambled data stream assuming that an authorized smart card has been inserted and the subscriber is entitled to receive the program. The descrambled data stream is demultiplexed by the demultiplexer 2 and decompressed and converted into the original analogue audio and video signal by the decompression unit 3.

In a pay TV system the control word required for descrambling, is transferred to the subscribers in so-called entitlement control messages containing the control word encrypted using a service key. This service key is downloaded in the memory 11 of the smart card 5 by means of a so-called entitlement management message for example. During operation the CAM 4 transfers the entitlement control messages towards the microprocessor 10 of the smart card 5 so that the microprocessor 10 can process the entitlement control message and extract the control word. Thereafter the smart card 5 returns the decrypted control word towards the CAM 4 so that the descrambler 7 is allowed to descramble the digital data stream received from the demodulator 1.

In order to prevent the use of an unauthorized smart card 5 in combination with the CAM 4 it is important to provide a secure communication between the CAM 4 and the smart card 5. According to the present invention the follo-5 wing method is used to provide such a secure communication. The steps of this method are shown in fig. 2. When a smart card is inserted into the decoder, the microprocessor 8 of the CAM 4 will generate two random numbers Ci and A. The microprocessor 8 will encrypt in a first message the random 10 numbers Ci and A under a public key of the CAM 4. The thus obtained first message is transferred to the smart card 5 and the microprocessor 10 will decrypt this first message using the secret key of the CAM 4. Thereafter the microprocessor 10 will return a second message to the CAM 4, said second message being the random number A encrypted under the number Ci used as encryption key. The microprocessor 8 of the CAM 4 decrypts this second message and verifies whether the random number A is correct. Assuming that the random number A is indeed correct, so that it may be assumed that 20 the inserted smart card 5 is an authorized smart card, the CAM 4 will then forward entitlement control messages containing the encrypted control word to the smart card 5 which will process the entitlement control message and extract the control word in a conventional manner. However, in the 25 return message towards the CAM 4, the smart card will forward the extracted control word encrypted under the key Ci and these encrypted control words are decrypted by the microprocessor 8 using the same key Ci. As soon as one tries to replace the inserted smart card 5 by an other smart card, for example by switching from the authorized smart card 5 to an unauthorized smart card, the CAM 4 will immediately establish such change as the key Ci will not be known to the new smart card, so that the CAM will no longer be able to descramble the return messages containing the control word. Thereby the descrambler unit 7 will be disabled.

The method described can be used in the same manner for providing a secure communication between the CAM 4 and

the decoder, wherein the same protocol as shown in fig. 2 is followed.

In summary it will be understood that if a new CAM 4 is connected to the other decoder parts, the microprocessor 6 of the decoder will generate the two random numbers Ci and A and as soon as the microprocessor 6 has decrypted the second message received from the microprocessor 8 of the CAM 4, and has verified that the random number A is correct, the key Ci will be used in all transmissions between the CAM 4 and the microprocessor 6.

The invention is not restricted to the above-described embodiments which can be varied in a number of ways within the scope of the claims. As an example for a further embodiment the CAM (i.e. the descrambler) may be part of the decoder. The decoder would now challenge the smart card to authenticate itself to obtain a secure communication between the smart card and the decoder.

20

6


#### CLAIMS


- Method for providing a secure communication between two devices, wherein a first device generates a random key (Ci) and transfers said key to a second device in a first message encrypted using a public key, wherein said second device decrypts the first encrypted message by means of a corresponding secret key to obtain said random key (Ci), wherein said random key is used to encrypt and decrypt transmissions between said devices.
- 2. Method according to claim 1, wherein after decryp-10 ting said encrypted message, said second device first returns said random key (Ci) in a second encrypted message with an authentication to said first device.
- 3. Method according to claim 2, wherein for providing said authentication said first device further generates a
  15 random number (A) and transfers this random number (A) together with said random key (Ci) in said first encrypted message to the second device, wherein the second device uses said random number (A) for authentication in the second encrypted message.
  - 4. Method according to claim 3, wherein said second device encrypts said random number (A) under said random key (Ci) to obtain said second encrypted message.
  - 5. Application of the method of anyone of the preceding claims in a decoder for a pay TV system, wherein said decoder comprises a conditional access module (CAM) and a smart card (SC), wherein said method is applied to provide a secure communication between the control access module and the smart card.
- 6. Application of the method of anyone of claims 1-4
  in a decoder for a pay TV system, wherein said decoder
  comprises a conditional access module (CAM) and a smart card
  (SC), wherein said method is applied to provide a secure
  communication between the decoder and the conditional access
  module.

- 7. Decoder for a pay TV system, comprising a conditional access module and a smart card, said conditional access module comprising means for generating a random key (Ci), means for encrypting said key in a first encrypted message using a public key encryption method, means for transfering said first encrypted message to the smart card, said smart card comprising means for receiving and decrypting said first encrypted message to obtain said random key, means for encrypting transmissions to the conditional access module under said random key, said conditional access module having means to decrypt said transmissions received from the smart card.
- 8. Decoder according to claim 7, wherein said smart card comprises means for returning said random key to the conditional access module in a second encrypted message with an authentication.
- Decoder according to claim 8, wherein said generating means of the conditional access module further generates a random number which is included in said first encrypted message, wherein the smart card is adapted to use said random number as authentication in the second encrypted message.
- 10. Decoder for a pay TV system, comprising a conditional access module and a smart card, wherein said decoder comprises means for generating a random key (Ci), means for encrypting said key in a first encrypted message using a public key encryption method, means for transfering said first encrypted message to the conditional access module, said conditional access module comprising means for receiving and decrypting said first encrypted message to obtain said random key, means for encrypting transmissions to the decoder under said random key, said decoder having means to decrypt said transmissions received from the conditional access module.
- 11. Decoder according to claim 10, wherein said conditional access module comprises means for returning said

random key to the decoder in a second encrypted message with an authentication.

12. Decoder according to claim 11, wherein said generating means of the decoder further generates a random number which is included in said first encrypted message, wherein the conditional access module is adapted to use said random number as authentication in the second encrypted message.

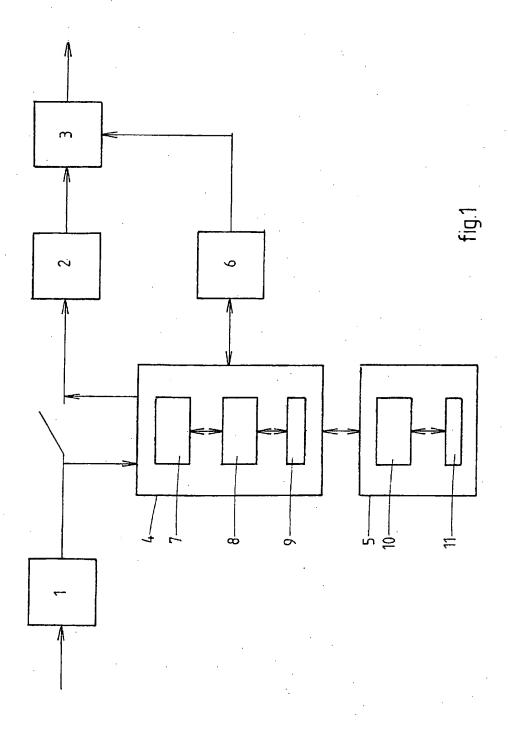

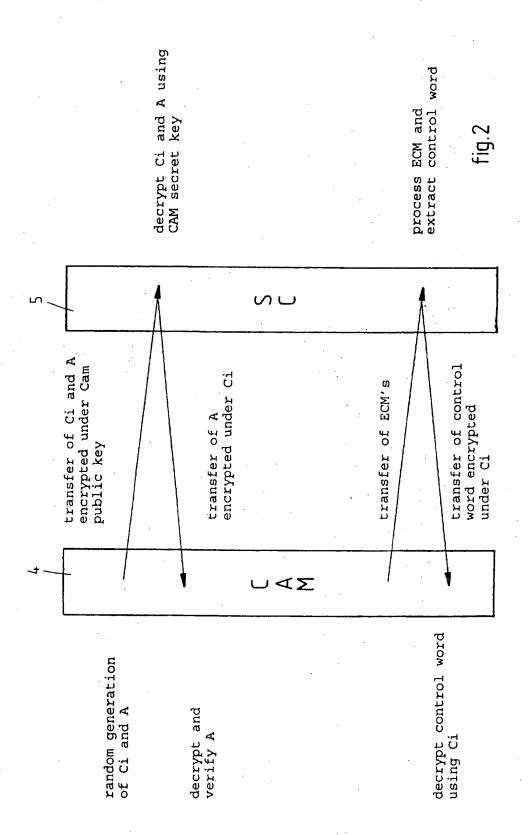

## INTERNATIONAL SEARCH REPORT

International Application No PCT/EP 97/01557

A. CLASS IPC 6	HO4N7/16 HO4N7/167				
]		. •			
According	to International Patent Classification (IPC) or to both national class	ssification and IPC			
	S SEARCHED				
Minimum of IPC 6	documentation searched (classification system followed by classific HO4N	:ation symbols)			
• •					
Documenta	ation searched other than minimum documentation to the extent tha	at such documents are included in the fields sear	ched		
		,			
		·	<u> </u>		
Electronic o	data base consulted during the international search (name of data b	pase and, where practical, search terms used)			
,					
- 20CH	TO POSSESSES TO BE BELCHANT				
C. DOCUN	MENTS CONSIDERED TO BE RELEVANT  Citation of document, with indication, where appropriate, of the	relausnt naggapet	Relevant to claim No.		
Caugo.,	Chaudi di tocuncia, was announced an	LEITABH homeker	New York W. C. C.		
A	EP 0 658 054 A (NEWS DATACOM LTD	)) 14 June	1-12		
	see column 1, line 37 - column 4				
Α	IEEE TRANSACTIONS ON CONSUMER EL vol. 35, no. 3, 1 August 1989,	ECTRONICS,	1-12		
, .	pages 464-468, XP000065971 COUTROT F ET AL: "A SINGLE COND		· ·		
	ACCESS SYSTEM FOR SATELLITE-CABL TERRESTRIAL TV" see the whole document	.E AND			
1					
A	EP 0 428 252 A (NEWS DATA SECURI PRODUCTS LT) 22 May 1991	TY	1-12		
	see the whole document				
		-/	•		
	<u> </u>				
	ther documents are listed in the continuation of box C.	X Patent family members are listed in a	unnex.		
•	tegories of cited documents:	'T' later document published after the interna			
"A" docum	ent defining the general state of the art which is not lered to be of particular relevance	or priority date and not in conflict with t cited to understand the principle or theor invention	he application dut y underlying the		
	document but published on or after the international	"X" document of particular relevance; the class			
"L" docume which	ent which may throw doubts on priority claim(s) or is cited to establish the publication date of another n or other special reason (as specified)	cannot be considered novel or cannot be involve an inventive step when the document of particular relevance; the data cannot be considered to involve an inventional considered to involve an inventional considered to involve an inventional cannot be considered to involve an inventional cannot be considered to involve an inventional cannot be considered novel or can	nent is taken alone imed invention		
"O" docume	"O" document referring to an oral disclosure, use, exhibition or document is combined with one or more other such documents, such combination being obvious to a person skilled				
	ent published prior to the international filing date but nan the priority date claimed	in the art.  *&* document member of the same patent fan	nily		
	actual completion of the international search	Date of mailing of the international search			
1	1 June 1997	- 4. 07. 97			
Name and m	nailing address of the ISA  European Patent Office, P.B. 5818 Patentiaan 2	Authorized officer			
	NL - 2280 HV Riswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+ 31-70) 340-3016	Greve, M			

## INTERNATIONAL SEARCH REPORT

Intermonal Application No PCT/EP 97/01557

C.(Continua	tion) DOCUMENTS CONSIDERED TO BE RELEVANT		· · · · · · · · · · · · · · · · · · ·
Category *	Citation of document, with indication, where appropriate, of the relevant passages		Relevant to claim No.
4	US 5 029 207 A (GAMMIE KEITH B) 2 July 1991		1,7,10
	see abstract		,
	****		
			, i
		•	
	. *		
			·.
		•	•
			., .
			•
			,
			. ~
		-	
			į ··
		·	
			ļ
		•	ļ. ·
		*	
			1
	· .		
			1

## INTERNATIONAL SEARCH REPORT

Intermuonal Application No
PCT/EP 97/01557

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0658054 A	14-06-95	IL 107967 A AU 8034294 A CA 2137608 A JP 7288522 A US 5590200 A	05-12-96 15-06-95 10-06-95 31-10-95 31-12-96
EP 0428252 A	22-05-91	IL 92310 A AU 642157 B AU 6230690 A CA 2025585 A JP 3210843 A US 5481609 A US 5282249 A	30-05-94 14-10-93 23-05-91 15-05-91 13-09-91 02-01-96 25-01-94
US 5029207 A	02-07-91	AU 635180 B AU 7340291 A CA 2049310 A EP 0466916 A JP 4506736 T WO 9111884 A US 5237610 A	11-03-93 21-08-91 02-08-91 22-01-92 19-11-92 08-08-91 17-08-93

# This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

	·
	☐ BLACK BORDERS
	☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
_	☐ FADED TEXT OR DRAWING
	BLURRED OR ILLEGIBLE TEXT OR DRAWING
	☐ SKEWED/SLANTED IMAGES
	☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
	☐ GRAY SCALE DOCUMENTS
	☐ LINES OR MARKS ON ORIGINAL DOCUMENT
	☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
	Потигр

## IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.